


INTERIOR TRIM

CONSOLE REMOVAL/INSTALLATION


id091700801200

1. Disconnect the negative battery cable.
2. Remove the console panel. (See 09-17-15 CONSOLE PANEL REMOVAL/INSTALLATION.)
3. Pull the panel upward and detach clips A, B and tabs C.
4. Disconnect the accessory socket connector.
5. Disconnect the seat warmer switch connectors. (vehicles with seat warmer system)
6. Remove the panel.

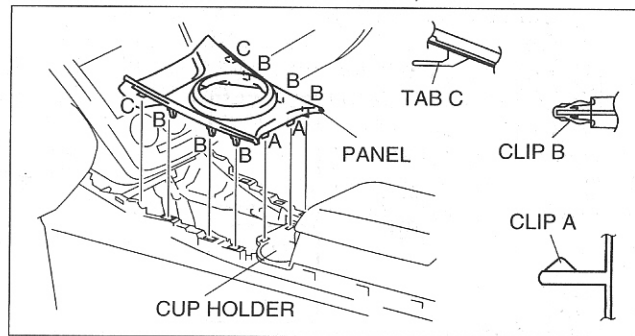

acxuww00000666

7. Remove the covers.
8. Remove the fasteners and screws.
9. Remove the pins A.
10. Remove the console.
11. Install in the reverse order of removal.

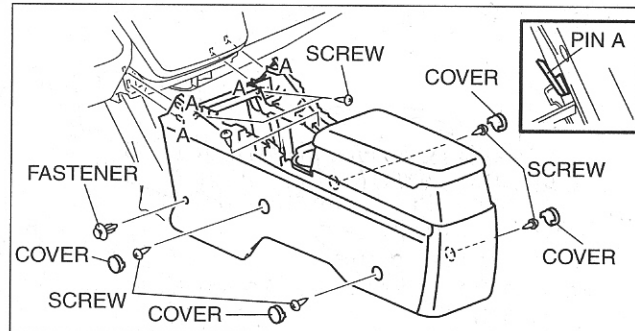

acxuww00000667

09-17