




GENUINE ACCESSORIES INSTALLATION INSTRUCTIONS

PART NUMBER:
0000 8T LO2


REAR BUMPER STEP PLATE

APPLICABLE MODELS
2006 > MAZDA 5

PACKAGE CONTENTS:

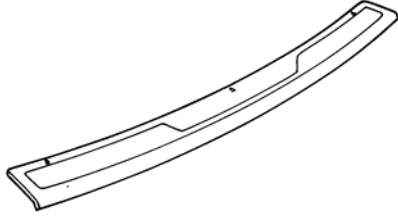

REAR BUMPER STEP PLATE (QTY: 1)



INSTALLATION SPACER (QTY: 2)
LEFTHAND & RIGHT HAND



ALCOHOL SWAB (QTY: 1)

0. BEFORE INSTALLATION

A. READ ENTIRE INSTALLATION INSTRUCTIONS BEFORE PROCEEDING.

2. PREPARE STEP PLATE

A. CONFIRM VEHICLE BUMPER IS COMPLETELY DRY BEFORE PROCEEDING.

B. ALIGN THE TWO INSTALLATION SPACERS (APPROXIMATELY 3 INCHES ON EACH END OF STEP PLATE) WITH THE MOLDED IN ARROWS. THE CENTER GROOVE OF EACH SPACER FIGURE "A" SHOULD BE FACING UP. **TAPE THE SPACERS ON THE TOP OF THE REAR STEP PLATE TO HOLD IN PLACE DURING INSTALLATION TO REAR BUMPER.**

C. LOCATE CENTER ARROW ON THE LEADING EDGE OF THE REAR BUMPER PLATE AND ALIGN TO THE CENTER LINE OF THE LATCH (AS SHOWN IN FIGURE "A").

**BEFORE REMOVING TAPE BACKING, TEST FIT SEVERAL TIMES TO VERIFY PROPER FIT, ALIGNMENT AND METHOD.*


1. PREPARE VEHICLE

A. VEHICLE MUST BE AT ROOM TEMPERATURE.

B. CLEAN MUD, DIRT, AND SALT FROM INSTALLATION AREA.

C. USING ALCOHOL SWAB CLEAN INSTALLATION AREA

D. ALLOW TO DRY.

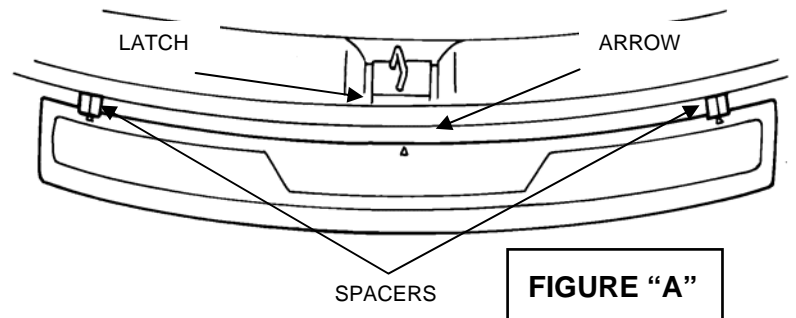

3. INSTALLING STEP PLATE

A. REMOVE TAPE BACKING. HOLD STEP BUMPER PLATE AT A 10 TO 20 DEGREE ANGLE TO THE BUMPER. ALIGN THE CENTER ARROW ON REAR BUMPER STEP PLATE TO THE CENTER OF THE LIFT GATE LATCH (FIGURE "A").

B. WHILE HOLDING STEP PLATE AND SPACERS AGAINST REAR BUMPER, FIRMLY PRESS REAR BUMPER STEP PLATE DOWN INTO POSITION. APPLY EQUAL AND FIRM PRESSURE ON ENTIRE SURFACE OF STEP PLATE INCLUDING BOTH ENDS.

C. REMOVE TAPE FROM SPACERS AND REMOVE SPACERS BY PULLING STRAIGHT UPWARD.

D. CLEAN STEP PLATE AREA TO REMOVE ANY HAND PRINTS OR DEBRIS.

